

# TAPERED H-SHIELD *Sloped Polyisocyanurate Insulation*

*Tapered H-Shield*

## PRODUCT DESCRIPTION

Tapered H-Shield is a sloped rigid roof insulation panel composed of a closed cell polyisocyanurate foam core manufactured on-line to a fiber reinforced facer on both sides (GRF). Tapered H-Shield is designed to promote positive drainage and prevent ponding water. For best results, request assistance from Hunter Panels Tapered Design Team.

## FEATURES AND BENEFITS

- Manufactured with NexGen Chemistry: Contains no CFCs, HCFCs, is Zero ODP, EPA Compliant, and has virtually no GWP
- Approved for direct application to steel decks
- Approved under major roof covering systems – BUR, Modified and Single-Ply


## PANEL CHARACTERISTICS

- Available in two grades of compressive strengths per ASTM C 1289 Type II, Class 1 Grade 2 (20 psi) or Grade 3 (25 psi)
- Available slopes are  $\frac{1}{16}$ " (2mm),  $\frac{1}{8}$ " (3mm),  $\frac{3}{16}$ " (5mm),  $\frac{1}{4}$ " (6mm),  $\frac{3}{8}$ " (10mm) and  $\frac{1}{2}$ " (13mm) per foot
- Available in 4'x4' (1220mm x 1220mm) and 4'x8' (1220mm x 2440mm) panels in thicknesses of .5" (13mm) minimum to 4.5" (114mm) maximum in a single layer
- Other panel sizes and facers are available upon special request

## ROOFING APPLICATIONS

- Constructions requiring FM Class 1 and UL Class A ratings
- Single-Ply Roof Systems (Ballasted, Mechanically Attached, Fully Adhered)
- Modified Bitumen Systems
- Built-Up Roofing: Asphalt and Coal Tar

## PROFILES

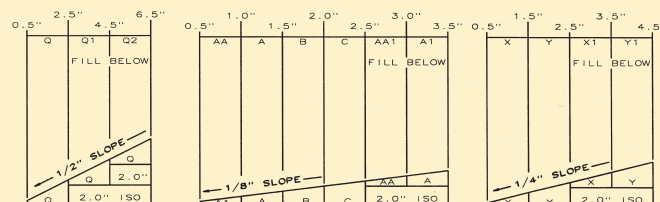

## Codes and Compliances

- ASTM C 1289 Type II, Class 1 Grade 2 (20 psi) or Grade 3 (25 psi)
- International Building Code (IBC) Chapter 26
- State of Florida Product Approval Number FL 5968
- Miami Dade County Product Control Approved

## Underwriters Laboratories Inc Classifications

- UL 1256
- Insulated Metal Deck Construction Assemblies – No. 120, 123, 292
- UL 790
- UL 263 Hourly Rated P Series Roof Assemblies

## UL Classified for use in Canada

- Refer to UL Directory of Products Certified for Canada for more details
- CCMC 13460-L
- UL Certified for Canada, CAN/ULC-S126, CAN/ULC-S101, CAN/ULC-S107
- CAN/ULC-S704 Type 2, Class 3 (20 psi) or Type 3, Class 3 (25 psi)

## Factory Mutual Approvals

- FM 4450, FM 4470
- Approved for Class 1 insulated steel deck constructions for 1-60 to 1-270. Refer to FM Approval's RoofNav for details on specific systems.

## LEED Potential Credits for Polyiso Use

### Energy and Atmosphere

- Optimize Energy Performance

### Materials & Resources

- Building Life-Cycle Impact Reduction
- Environmental Product Declarations
- Materials Reuse
- Recycled Content
- Construction and Demolition Waste Management

# TYPICAL PHYSICAL PROPERTY DATA CHART PER ASTM C 1289 – **POLYISO FOAM CORE ONLY**

PROPERTY	TEST METHOD	VALUE
Compressive Strength	ASTM D 1621	20 psi* (138kPa, Grade 2)
Dimensional Stability	ASTM D 2126	2% linear change (7 days)
Moisture Vapor Transmission	ASTM E 96	< 1 perm (57.5ng/(Pa•s•m <sup>2</sup> ))
Water Absorption	ASTM C 209	< 1% volume
Flame Spread**	ASTM E 84	< 75
Smoke Developed**	ASTM E 84	< 450
Service Temperature	–	-100° to 250° F (-73°C to 122°C)

\*Also available in 25 psi, Grade 3

\*\*Meets the requirements of the IBC code. For specific Flame Spread or Smoke Developed Ratings - please contact the Hunter Panels Technical Department

## WARNINGS AND LIMITATIONS

Insulation must be protected from open flame and kept dry at all times. Install only as much insulation as can be covered the same day by completed roof covering material. Hunter Panels will not be responsible for specific building and roof design by others, for deficiencies in construction or workmanship, for dangerous conditions on the job site or for improper storage and handling. Technical specifications shown in this literature are intended to be used as general guidelines only and are subject to change without notice. For more information refer to the Storage and Handling Technical Bulletin at [www.hpanels.com](http://www.hpanels.com), or refer to PIMA Technical Bulletin No. 109: *Storage & Handling Recommendations for Polyiso Roof Insulation* at [www.polyiso.org](http://www.polyiso.org).

## INSTALLATION

### Single-Ply Systems

#### Ballasted Single-Ply Systems

Each Tapered H-Shield panel is loosely laid on the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

#### Mechanically Attached Single-Ply Systems


Each Tapered H-Shield panel must be secured to the roof deck. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

#### Fully Adhered Single-Ply

Each Tapered H-Shield panel must be secured to the roof deck. Maximum 4'x4' (1220mm x 1220mm) panels of Tapered H-Shield may be adhered to a prepared concrete deck or subsequent layers of insulation with a full mopping of hot steep asphalt, insulation adhesive or cold applied mastic. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

### Built Up, Coal Tar and Modified Bitumen Systems (APP, SBS)

Each Tapered H-Shield panel must be secured to the roof deck. Maximum 4'x4' (1220mm x 1220mm) panels of Tapered H-Shield may be adhered to a prepared concrete deck or subsequent layers of insulation with a full mopping of hot steep asphalt, insulation adhesive or cold applied mastic. Butt edges and stagger joints of adjacent panels. Install the roof covering according to the manufacturer's specifications.

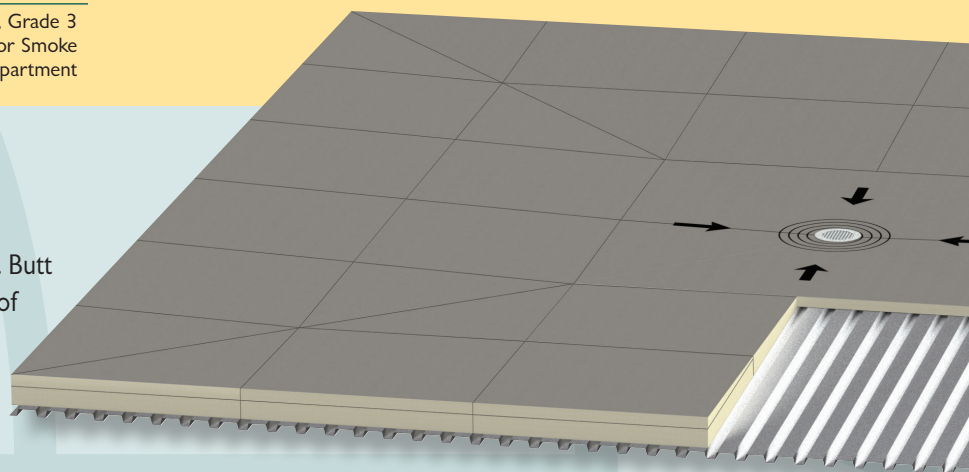

**Tapered H-Shield**

H U N T E R  
Energy Smart Polyiso

HUNTERPANELS.COM

15 FRANKLIN STREET, PORTLAND, ME 04101 • 888.746.1114 • FAX: 877.775.1769

